Motion Activated
DECORATIVE LIGHTING

Heath/Zenith
SPECIFICATION SHEET

Model # **SL-4192**

Available Colors: Black (SL-4192-BK), White (SL-4192-WH) and Antique Bronze (SL-4192-AZ)

SPECIFICATIONS

Power Supply
• 120VAC, 60 Hz

Wires
• AWG#18 (UL Recognized)

Max Load
• Up to 100 Watts Incandescent, Medium Base

Operating Temperature
• -22° F to +120° F

Sensor Capacity
• Up to 360 Watts (3.0 A) Maximum Incandescent

Range
• Detects motion up to 30 Feet

Operating Modes
• TEST, AUTO/ACCENT, MANUAL

ON-Timer
• TEST, 1, 5 or 10 Minutes

DUALBRITE® Timer
• OFF, 3 hours, 6 hours or dusk-to-dawn

Dimensions
W: 7”
D: 8.5”
H: 18.5”

c UL us

Features
• Curved beveled glass
• Die cast, weather resistant finish
• 180° motion detection angle
• Selectable on-time from 1, 5 or 10 minutes
• Adjustable sensitivity
• 2 Year Warranty

Applications
• Porch *• Garage* *• Breezeway*

Operating Modes
TEST: Overrides the photocell to allow the light to be setup during daylight hours.
AUTO/ACCENT: Lights automatically come on when motion is detected and then dim to 50% brightness when DUAL-BRITE® is turned on.
MANUAL: Lights stay on full bright until dawn. Photocell then resets light to AUTO mode.

DUALBRITE® Timer
Dims light to 50% power for accent lighting. There are 3 preset selections for the amount of time the lights stay on: 3 hours after dusk, 6 hours after dusk, or dusk-to-dawn. Can also be turned OFF.

ON-Timer
Turns lights on full bright when motion is detected. There are 4 preset selections for the amount of time the lights stay on: Test (5 seconds), 1, 5 or 10 minutes.

Adjustable Sensitivity
You can adjust the motion sensor’s sensitivity to movement of heat.

JOB #	
JOB NAME	

HeathCo™
2445 Nashville Road
P.O. Box 90045
Bowling Green, KY 42102-9045
Tech Service (800) 858-8501
Sales (270) 846-8400
Fax (270) 846-8501
www.heath-zenith.com

FA10114 0113

Motion Activated DECORATIVE LIGHTING

Heath/Zenith
SPECIFICATION SHEET

USAGE & COVERAGE

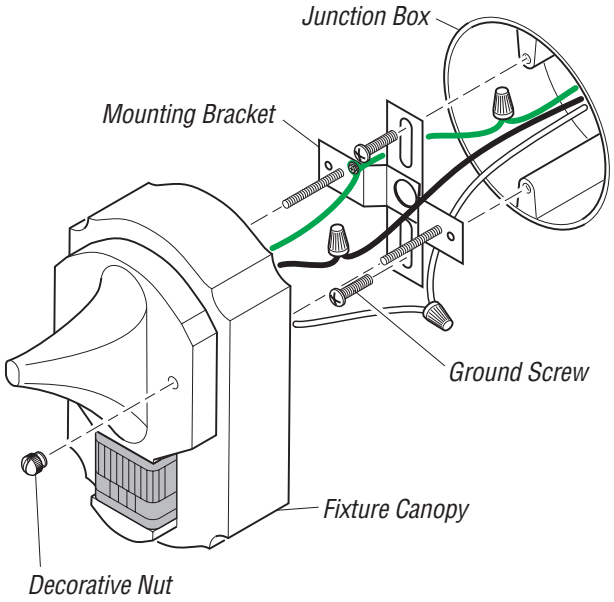

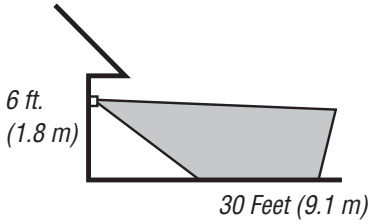

MAXIMUM RANGE

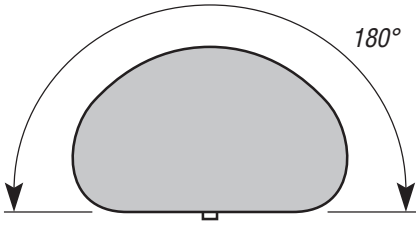

COVERAGE ANGLE (TOP VIEW)

WIRING

⚠ *WARNING: Turn power off at the circuit breaker before wiring.*

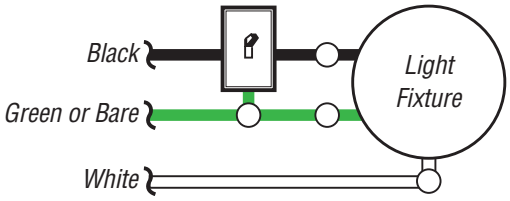

ONE MOTION SENSING LIGHT

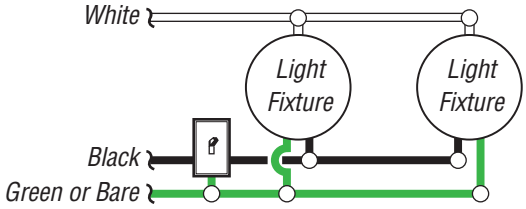

TWO MOTION SENSING LIGHTS (WORKING INDEPENDENTLY)

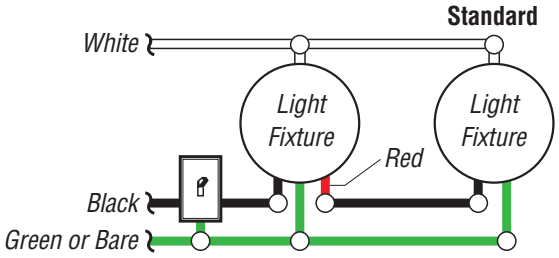

WIRING MOTION SENSING LIGHT TO CONTROL STANDARD FIXTURE

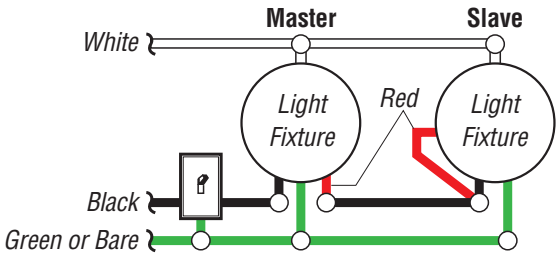

WIRING MOTION SENSING LIGHT TO CONTROL ANOTHER MOTION SENSING LIGHT